

# Gigabay 2S UFO

Power & Colour Selectable Highbay 4K 5K 6K

**brightLED**  
...BRIGHTENING YOUR FUTURE



## Overview

Our Gigabay 2S is a robust LED low/high bay luminaire that can be used in industrial, commercial and retail settings. With a die-cast powder-coated construction and aluminium heatsink to optimise thermals, it delivers excellent performance of 150lm/W and 50,000 hours' lifespan.


The fitting is 1-10V dimmable as standard and has a lumen output range of 15,000-30,000 lumens dependent on colour and power selected via the easy-to-access switches. With plug and play microwave and PIR sensor options, it's a brilliantly versatile and cost-effective addition to your lighting setup.

## Features


- Lens options
- Plug & play sensor compatible PIR & microwave
- Selectable colour temperature 4000K, 5000K, 6000K
- Selectable power options of 70W/100W/120W, 90/120/150W, 120/150/200W giving output range from 12000 to 33000 lumens
- IP66 | IK10
- 50,000 hours or 5-year warranty
- 1-10V dimming as standard

## Product Dimensions

100W/150W

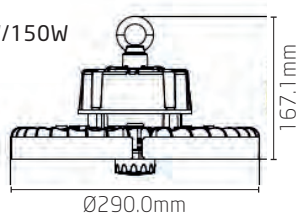


200W



E: [office@bright-led.co.uk](mailto:office@bright-led.co.uk)  
T: 01282 505400 F: 0844 854 8662

[www.bright-led.co.uk](http://www.bright-led.co.uk)

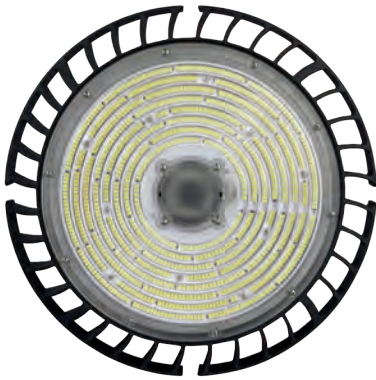

Upward view




Gigabay2 with PIR sensor



DIP switch adjustment

### Photometric Performance

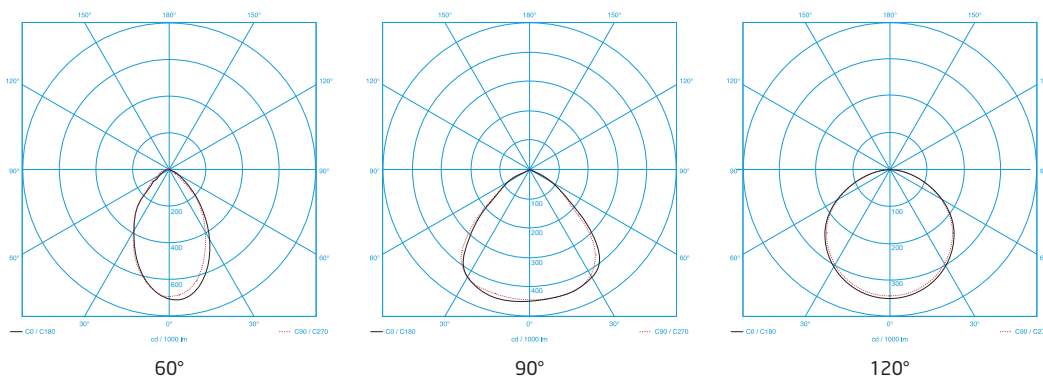

### Product Specification

Code	Description	Lumens per Watt	Lumen Range
GB2S-CCT-70/120-60-10	70/100/120W Gigabay 2S 4000K/5000K/6000K 60° 1-10v dimming	151lm/W to 174lm/W	11780lm to 18560lm
GB2S-CCT-70/120-90-10	70/100/120W Gigabay 2S 4000K/5000K/6000K 90° 1-10v dimming		
GB2S-CCT-70/120-120-10	70/100/120W Gigabay 2S 4000K/5000K/6000K 120° 1-10v dimming		
GB2S-CCT-90/150-60-10	90/120/150W Gigabay 2S 4000K/5000K/6000K 60° 1-10v dimming	146lm/W to 177lm/W	14685lm to 24955lm
GB2S-CCT-90/150-90-10	90/120/150W Gigabay 2S 4000K/5000K/6000K 90° 1-10v dimming		
GB2S-CCT-90/150-120-10	90/120/150W Gigabay 2S 4000K/5000K/6000K 120° 1-10v dimming		
GB2S-CCT-120/200-60-10	120/150/200W Gigabay 2S 4000K/5000K/6000K 60° 1-10v dimming	152lm/W to 174lm/W	19640lm to 33000lm
GB2S-CCT-120/200-90-10	120/150/200W Gigabay 2S 4000K/5000K/6000K 90° 1-10v dimming		
GB2S-CCT-120/200-120-10	120/150/200W Gigabay 2S 4000K/5000K/6000K 120° 1-10v dimming		

### Customisation Options

Code	Description
MD	Microwave Sensor
PD	PIR Sensor
L32	3W Lithium Emergency 500lm
L62	6W Lithium Emergency 1000lm
SL32	Self test 3W Lithium Emergency 500lm
SL62	Self test 6W Lithium Emergency 1000lm

